



RTD® Application Procedures






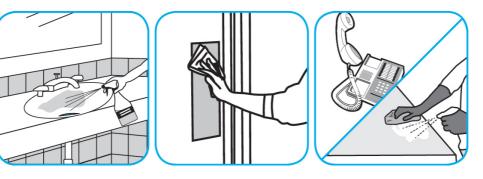

Apply use-solution to hard, nonporous surfaces. Thoroughly wet surface with a cloth, mop, sponge, sprayer or by immersion. Allow to remain wet for 10 minutes. Wipe dry or allow to air dry.

Use Pro Strip[™] SC High Efficiency Floor Stripper to remove existing floor finish.



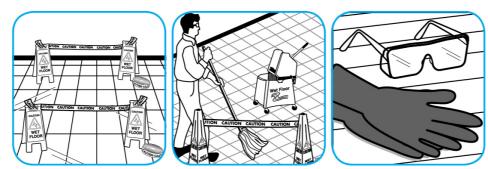

Blockade areas to be stripped. Floors will become very slippery when stripper is applied. Exercise caution.

Questions: 1-800-558-2332

Always wear personal protective equipment.

© 2018 Diversey, Inc. All Rights Reserved. *The hummingbird and wing shape logo is a trademark of Diversey, Inc.

